INSTALLATION INSTRUCTIONS

For Model # 05246 (New. 2/21/2003)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the Crossbar (B) to the Outlet Box using the two Screws (C) from the outlet box. The side of the Crossbar marked "GND" must face out.
4. Thread two Studs (A) about 1/4" into the pre-drilled holes in the Crossbar (B) spaced the same distance apart as the holes of Fixture Body (D).

CONNECTING THE WIRES (Fig.2)

5. While holding the Fixture Body (D) towards the ceiling, connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the Crossbar using the Green Screw provided. After wires are connected, tuck them carefully into the ceiling Junction Box.

FINISHING THE INSTALLATION (Fig. 1)

6. Finish hanging the fixture by placing Fixture Body (D) over both Studs (A) and tighten studs.
7. Install the light bulbs in accordance with fixtures specifications. **(CAUTION: Do not exceed the maximum wattage rating!)**
8. Screw Glass Shade (E) into Fixture Body (D) as shown in Fig. 1.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

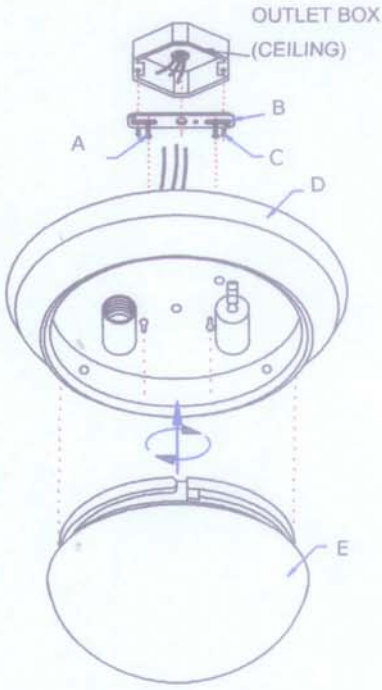

Fig. 2

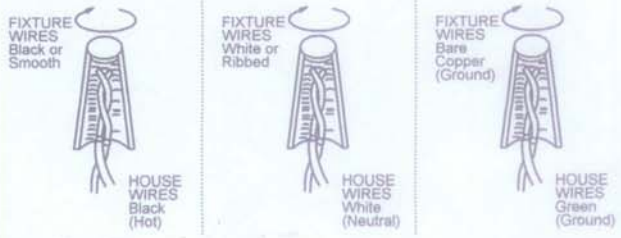
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green (Ground)

MIN 90°C SUPPLY CONDUCTORS

In the event that you should have any installation question or are missing parts, please contact **Customer Service**. Customer service may be reached weekdays a ***1-800-527-0998*** between the hours of 8:00am and 5:00pm PST (Pacific Standard Time).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

INSTRUCCIONES PARA LA INSTALACION

Para Model # 05246 (Rev. 4/12/2003)

ADVERTENCIA! CORTE LA CORRIENTE DESDE EL FUSIBLE O EL INTERRUPTOR CENTRAL.

INSTALANDO LA LAMPARA (Fig.1)

1. Corte la corriente en el circuito principal y saque la lampara vieja incluyendo la barra transversal vieja.
2. Desempaque cuidadosamente su nueva lampara y coloque todas las partes en un superfiice despejada. Tenga cuidado de no perder las partes pequenas que son necesarias para la instalacion.
3. Coloque la Barra Transversal (B) a la caja de distribucion del techo con los dos tornilllos (C). El lado de la Barra Transversal marcado "GND" debe quedar hacia afuera.
4. Instale los dos Tachones (A) aproximadamente 1/4" en los agujeros de la Barra Transversal (B) a la misma distancia de separacion que los agujeros de la Lampara (D).

CONECTANDO LOS ALAMBRES (Fig.2)

5. Mientras que sostiene el la Lampara (D) contra el techo, Conecte el alambrado electrico como se muestra en la (Fig.2), use los conectores de plastico para asegurar las conexiones. Si su caja de union tiene un alambre a tierra (verde o de cobre), conectelo al alambre a tierra de la lampara. Si no tiene, entonces conecte el alambre a tierra de la lampara directamente a la barra transversal usando el tornillo verde incluido.

TERMINANDO LA INSTALACION (Fig. 1)

6. Coloque la Lampara (D) sobre los dos Tachones (A) y apriete los Tachones.
7. Instale los focos (no incluidos) de acuerdo a las especificaciones de la lampara. (**CUIDADO: NO EXCEDA EL MAXIMO DE VATIOS ESPECIFICADOS!**)
8. Instale la pantalla de vidrio (E) como se muestra en la ric. 1

Instale la Pantalla de Vidrio atornillandola sobre la Lampara.

Fig. 1

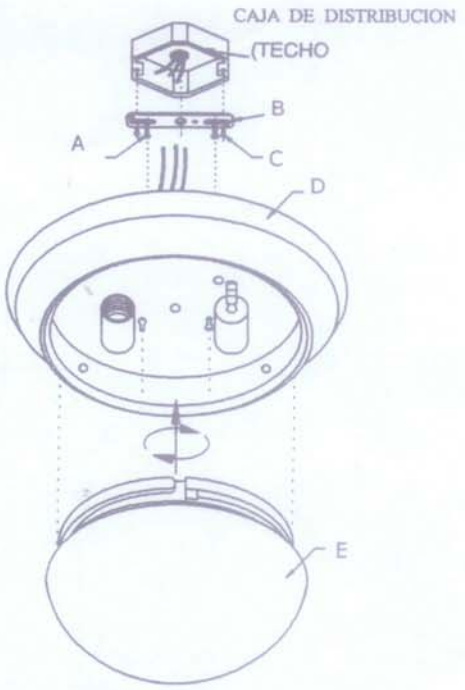

Fig. 2

ALAMBRES DE LA LAMPARA NEGRO O SIN MARCA
ALAMBRES DE LA CASA NEGROS (CON CORRIENTE)
ALAMBRES DE LA LAMPARA BLANCO O CON MARCA
ALAMBRES DE LA CASA BLANCO (NEUTRAL)
ALAMBRES DE LA LAMPARA VERDE O DE COBRE (A TIERRA)
ALAMBRES DE LA CASA VERDE O DE COBRE (A TIERRA)

CONDUCTORES DE ALIMENTACION
CON MINIMO DE 90°C

HAMPTON BAY FAN & LIGHTING Co.

En caso de preguntas sobre la instalacion o le faltaron parts, porfavor hablar al departamento de servicio al clienteal ***1-800-527-0998*** de Lunes a Viernes de 8:00am a 5:00pm PST (tiempo del pacifico).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-701E/S